


STANLEY®

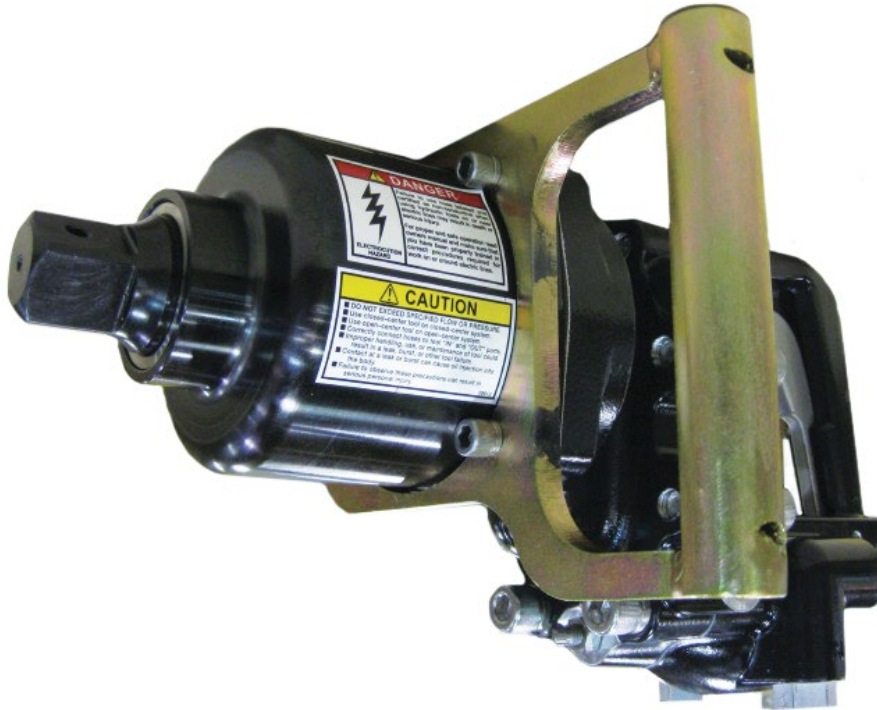

IW16 IMPACT WRENCH

The IW16 Hydraulic Impact Wrenches are highly regarded for their adjustable impact intensity settings, offering versatility for various applications. Designed to withstand the rigors of track maintenance, these wrenches feature a rugged design with an integral motor and heavy-duty mechanism. They boast an unmatched power-to-weight ratio, making them the ideal choice for users in their class.

IW16 IMPACT WRENCH

FEATURES AND BENEFITS

- Medium to heavy duty wrench ideal for nut and bolt driving, anchor bolts and drilling applications
- Designed to run from a wide range of hydraulic circuits, the IW16 has adjustable impact intensity making it ideal for a wide range of heavy duty driving
- The large “D” handle and feathering trigger is convenient and gives the operator complete control of the wrench.
- Just set the direction of rotation to either tighten or loosen a fastener, squeeze the trigger for up to 2500 ft lbs (3400 Nm) of torque.
- Standard reversing valve provides instant change over from forward to reverse

SPECIFICATIONS

CAPACITY	1 IN. SQUARE DRIVE
TORQUE	500 - 2500 FT LBS / 680 - 3400 NM
INPUT PRESSURE	1500 - 2000 PSI / 105 - 140 BAR
WEIGHT	26 LBS / 12 KG
LENGTH	14.5 IN. / 37 CM
WIDTH	4.5 IN. / 11 CM
CONNECTION	3/8 IN. MALE PIPE ADAPTER
PORTS	-8 SAE O-RING
MOTOR	INTEGRAL
HOSE WHIPS	NO
MAXIMUM FLOW	7 - 12 GPM / 26 - 45 LPM

ORDER INFORMATION

MODEL NO.	DESCRIPTION
IW16150	1 IN. SQUARE DRIVE
IW1615001	1 IN. SQUARE DRIVE, CE
IW16350	1 IN. SQUARE DRIVE, UNDER WATER
IW1635001	1 IN. SQUARE DRIVE, CE, UNDER WATER

ACCESSORIES

PART NO.	DESCRIPTION
31201	ADAPTER, 1 IN. TO 3/4 IN. DRIVE
31203	EXTENSION, 10 IN., 1 IN. DRIVE
33276	SOCKET RETAINER PIN, 1 IN. SQUARE DRIVE SOCKET
33277	SOCKET RETAINER RING, 1 IN. SQUARE DRIVE SOCKET
SOCKETS	SEE SOCKET SPEC SHEET FOR A LIST OF ALL SOCKETS

STANLEY[®]

3810 SE Naef Road // Milwaukie, OR 97267 // 833-723-1843 // www.stanleyinfrastructure.com