



MSD DESTROYER™


EXTREME DUTY MOBILE SCRAP SHEARS

MEETING THE TOUGH DEMANDS OF DEMOLITION AND SHIP BREAKING

Built for the harshest jobs, LaBounty's Destroyer Class Shear boasts integrated reinforcement and superior protection to minimize downtime and maximize productivity. Not only stronger, the Destroyer can take on bigger jobs so you can put more on the ground.

MSD DESTROYER SERIES

EXTREME DUTY MOBILE SCRAP SHEARS

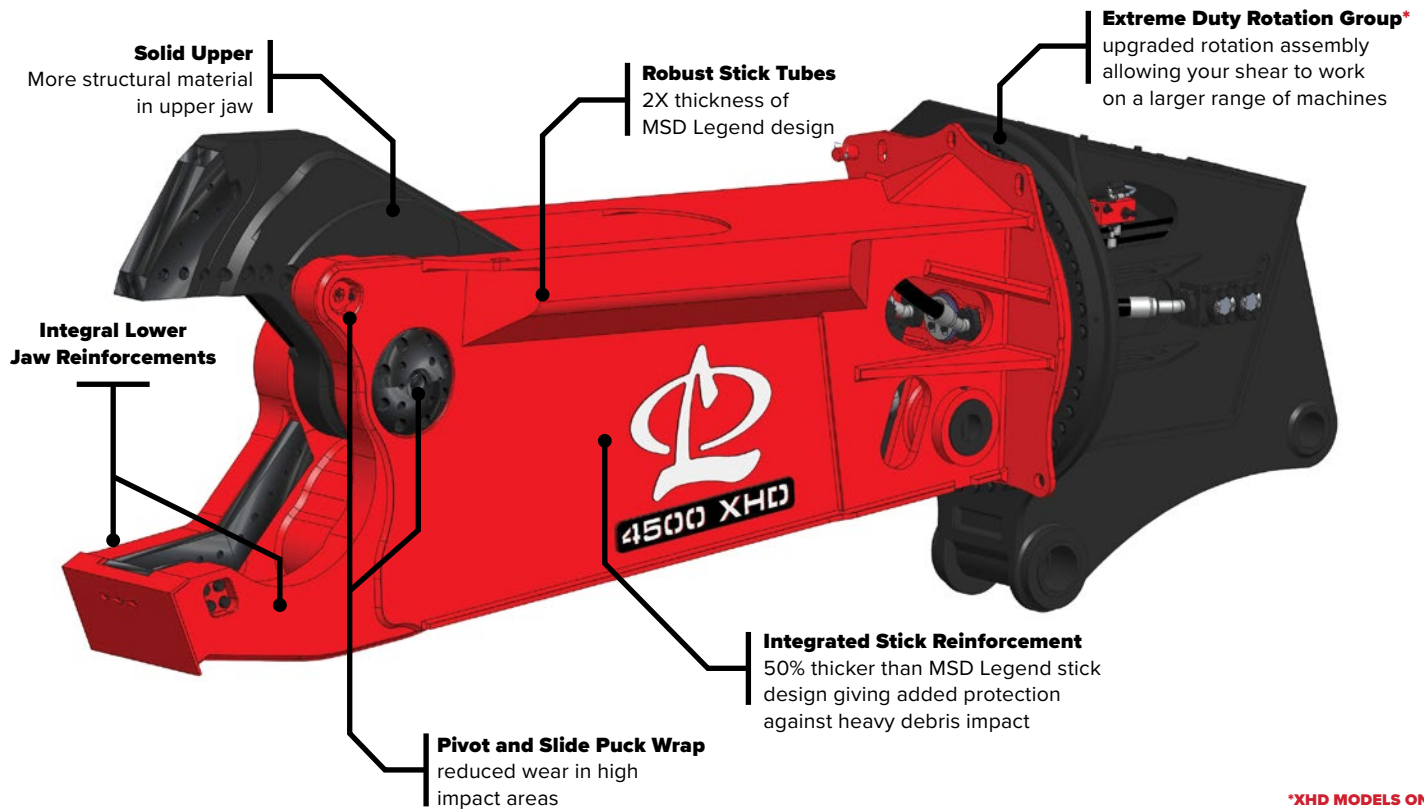

SPECIFICATIONS

Model	Weight*		Jaw Opening		Jaw Depth		Reach**		Min Excavator Weight - 2nd Member***		Min Excavator Weight - 3rd Member***	
	lbs	kg	in	mm	in	mm	ft.	m	lbs	mTons	lbs	mTons
MSD 2500R HD	16,100	7,300	31	787	33	838	12.7	3.9	79,000	36	119,000	54
MSD 2500R XHD	16,400	7,400	31	787	33	838	11.9	3.6	81,000	37	143,000	65
MSD 3000R HD	18,500	8,400	34	864	38	965	13.1	4.1	99,000	45	165,000	75
MSD 4000R HD	21,700	9,900	38	965	43	1092	14.8	4.5	110,000	50	182,000	82
MSD 4000R XHD	24,100	10,970	38	965	43	1092	14.8	4.5	121,000	55	250,000	114
MSD 4500R HD	23,300	10,600	39	990	43	1092	14.2	4.3	110,000	50	187,000	85
MSD 4500R XHD	25,700	11,700	39	990	43	1092	14.2	4.3	132,000	60	264,000	120

*Weight includes standard excavator mounting bracket. Attachment weight may vary depending on mounting configuration as well as options.

** Reach is measured from the attachment mounting pivot (boom or stick) forward to the end of the jaw.

*** Excavator weight range is a guide only. 2nd member configurations at or near min/max excavator weight and all 3rd member configurations must be preapproved by LaBounty. Quick couplers, short swing machines, long arms all impact carrier size recommendation.

LaBounty reserves the right to improve, update, or change the product specifications, appearance, or functional attributes without notice.

LABOUNTY

1538 Hwy 2 // Two Harbors, MN 55616 // 833-723-1843 // www.stanleyinfrastructure.com

2024.03.28