


STANLEY®

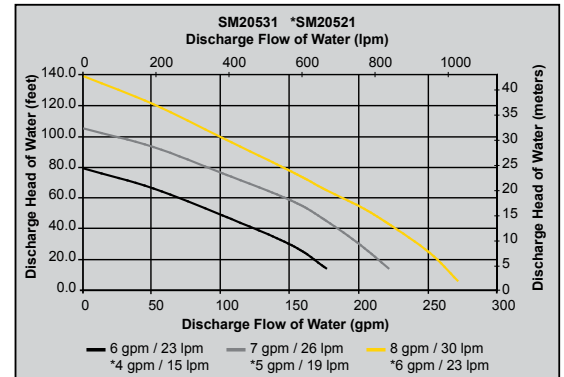

SM20 SUMP PUMP

The SM20 Water Pump is both lightweight and durable, making it a top choice for pumping needs. With a capacity of 250 gpm (946 lpm) at a 10-foot head and the ability to move solids up to 5/16 of an inch, it is perfectly suited for use in vaults and manholes. The SM20 outperforms most gasoline engine-driven pumps, and eliminates the need for recoil starting, priming, or suction hose that is typical of gas engine-driven pumps. It can even be run dry without any damage.

SM20 SUMP PUMP

FEATURES

- Submersed into the water and with its easy hookup to a power unit, the SM20 is instantly pumping
- The standard urethane impeller is highly abrasion resistant for long service pumping gritty slurries
- The abrasion resistant cast iron inlet wear ring is easily replaced from the inlet sit of the pump
- With only a few moving parts, the SM20 is virtually maintenance free

SPECIFICATIONS

| | |
|----------------|---|
| CAPACITY | 2-1/2 IN. DISCHARGE |
| PERFORMANCE | 250 GPM / 946 LPM |
| FLOW RANGE | 4 - 9 GPM / 15 - 34 LPM |
| PRESSURE | 1000 - 2000 PSI / 70 - 140 BAR |
| PORTS | -8 SAE O-RING |
| WEIGHT | 13.7 LBS / 6.3 KG |
| LENGTH | 7.5 IN. / 19 CM |
| WIDTH | 9.6 IN. / 24 CM |
| CONNECTION | 3/8 IN. FLUSH-FACE QUICK DISCONNECT COUPLER |
| HOSE WHIPS | NO |
| MOTOR | INTEGRAL |
| DISCHARGE SIZE | 2-1/2 IN. FEMALE PIPE THREADS |

ORDER INFORMATION

| PART NO. | DESCRIPTION |
|-----------|---------------------------------------|
| SM2043101 | 8 GPM (30 LPM), CE, STEEL IMPELLER |
| SM2052101 | 5 GPM (20 LPM), CE, URETHANE IMPELLER |
| SM2053101 | 8 GPM (30 LPM), CE, URETHANE IMPELLER |

ACCESSORIES

| PART NO. | DESCRIPTION |
|----------|---|
| 02183 | FIRE HOSE, 25 FT X 2-1/2 IN. DIAMETER |
| 02317 | FIRE NOZZLE, 1 IN. |
| 05133 | THREAD ADAPTER FOR PUMP TO FIRE HOSE, 2-1/2 IN. |
| 05134 | FIRE HOSE, 50 FT X 2-1/2 IN. DIAMETER |
| 05135 | SPANNER WRENCH FOR PIN LUG COUPLER |
| 29884 | 2-1/2 IN. COMBINATION NIPPLE (NPT) |