


# STANLEY®

www.stanleyinfrastructure.com

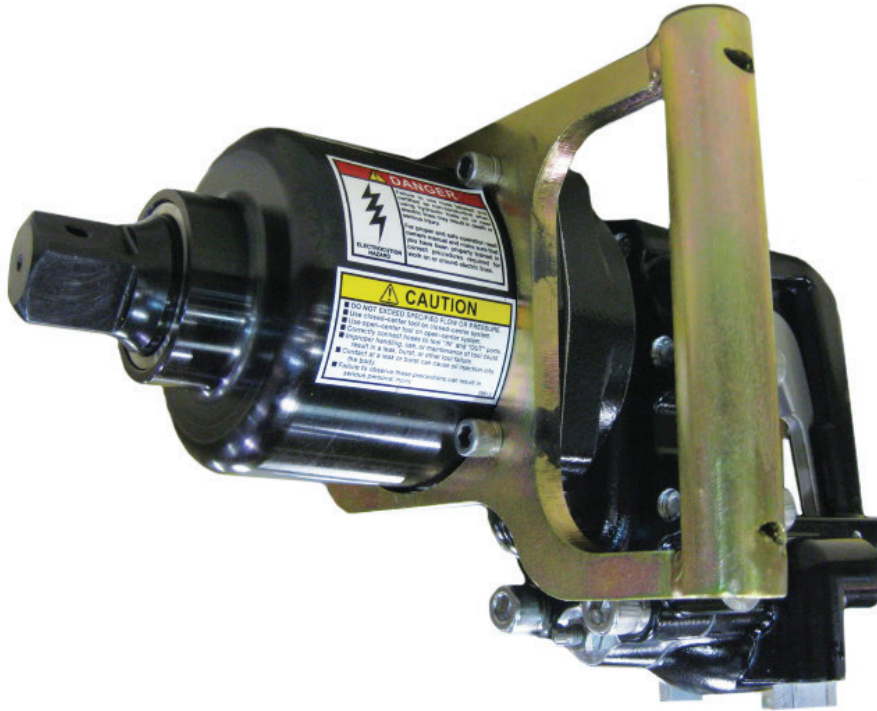

## IW16

## IMPACT WRENCH

### 2500 FT. LBS OF PURE TORQUE

Stanley's Hydraulic Impact Wrenches are world renowned for their adjustable impact intensity settings allowing for a wide range of uses. The rugged design incorporates an integral motor and heavy-duty mechanism for the rigors of track maintenance use. The power-to-weight ratio of these products is un-matched by any impact wrench on the market in their class.

# IW16

# IMPACT WRENCH

## FEATURES AND BENEFITS

- Medium to heavy duty wrench ideal for nut and bolt driving, anchor bolts and drilling applications
- Designed to run from a wide range of hydraulic circuits, the IW16 has adjustable impact intensity making it ideal for a wide range of heavy duty driving
- The large “D” handle and feathering trigger is convenient and gives the operator complete control of the wrench.
- Just set the direction of rotation to either tighten or loosen a fastener, squeeze the trigger for up to 2500 ft lbs (3400 Nm) of torque.
- Standard reversing valve provides instant change over from forward to reverse

## SPECIFICATIONS

IW16	
CAPACITY	1 IN. SQUARE DRIVE
TORQUE	500 - 2500 FT LBS / 680 - 3400 NM
INPUT PRESSURE	1500 - 2000 PSI / 105 - 140 BAR
WEIGHT	26 LBS / 12 KG
LENGTH	14.5 IN / 37 CM
WIDTH	4.5 IN / 11 CM
CONNECTION	3/8 IN. MALE PIPE ADAPTER
PORTS	-8 SAE O-RING
MOTOR	INTEGRAL
HOSE WHIPS	NO
MAXIMUM FLOW	7 - 12 GPM / 26 - 45 LPM

## ORDER INFORMATION

MODEL NO.	DESCRIPTION
IW16150	1 IN. SQUARE DRIVE
IW1615001	1 IN. SQUARE DRIVE, CE
IW16350	1 IN. SQUARE DRIVE, UNDER WATER
IW1635001	1 IN. SQUARE DRIVE, CE, UNDER WATER

## ACCESSORIES

PART NO.	DESCRIPTION
31201	ADAPTER, 1 IN. TO 3/4 IN. DRIVE
31203	EXTENSION, 10 IN., 1 IN. DRIVE
33276	SOCKET RETAINER PIN, 1 IN. SQUARE DRIVE SOCKET
33277	SOCKET RETAINER RING, 1 IN. SQUARE DRIVE SOCKET
SOCKETS	SEE SOCKET SPEC SHEET FOR A LIST OF ALL SOCKETS

## WARRANTY

Stanley tools and associated parts are warranted against defects in materials and workmanship for a period of 18 months from the date of purchase. Stanley Hydraulic Tools reserves the right to repair or replace only those parts which prove to have been defective at the time of purchase. This warranty becomes void if maximum voltage and current ratings are exceeded.